

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 712 960 A1**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
22.05.1996 Bulletin 1996/21

(51) Int Cl.<sup>6</sup>: **D21H 21/30, C11D 3/42**  
// D21H17:71, D21H17:06,  
D21H17:53, D21H19:44

(21) Application number: **95810660.1**

(22) Date of filing: **26.10.1995**

(84) Designated Contracting States:  
**BE CH DE ES FR GB IT LI SE**

(30) Priority: **04.11.1994 GB 9422280**

(71) Applicant: **CIBA-GEIGY AG**  
**CH-4002 Basel (CH)**


(72) Inventors:

- Rohringer, Peter  
CH-4124 Schönenbuch (CH)
- Grienberger, Marc R.  
F-68870 Bartenheim (FR)

(54) **Fluorescent whitening agent formulation**

(57) There is described a liquid preparation comprising:

a) 10 to 40 % by weight of the fluorescent whitening agent having the formula:

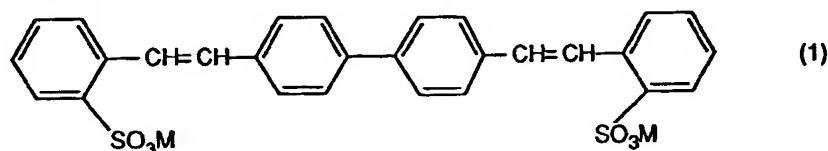

wherein M is hydrogen, an alkali metal, ammonium or magnesium;

- b) 10 to 85 % by weight of polyethylene glycol having a mean molecular weight in the range of from 150 to 500;
- c) 0 to 75 % by weight of water; and
- d) 0 to 20 % by weight of one or more auxiliary compounds; each based on the total weight of the liquid preparation.


The new formulation is suitable for the fluorescent whitening of paper or detergents, and is stable over a wide range of temperature.

**EP 0 712 960 A1**

## Description

The present invention relates to a fluorescent whitening agent formulation and, in particular, to such a formulation which is suitable for the fluorescent whitening of paper or detergents and which is stable over a wide range of temperature.

The fluorescent whitening agent having the formula:

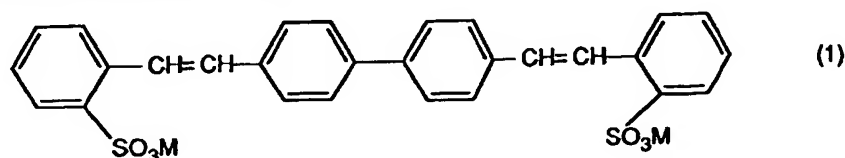

wherein M is hydrogen, an alkali metal, preferably lithium, sodium or potassium, ammonium or magnesium, as described in GB-A-1 247 934, has proved to be extremely effective in the fluorescent whitening of a wide range of textile fibre materials.

The fluorescent whitening agent having the formula (1) is usually formulated as a liquid in order to facilitate its handling, metering and transportation.

For example, as described in GB-A-1 275 162, the fluorescent whitening agent having the formula (1) has been formulated, for textile treatment, as a preparation comprising a dispersed form of the said fluorescent whitening agent having the formula (1) and an organo-soluble tenside in an organic solvent which can take up a maximum of 1 % by weight of water. Preferred solvents are the volatile solvents 1,1,1-trichloroethane, trichloroethylene and perchloroethylene.

These known liquid formulations are disadvantageous in that they are expensive, the use of a hazardous organic solvent is unavoidable and further auxiliaries, such as urea, must be used, moreover in considerable amounts, in order to attain the desired solubility of the fluorescent whitening agent and to control, at least to some extent, the permanent variation in the cold stability of the said liquid formulation.

It has now been found that the disadvantages of known liquid preparations of the fluorescent whitening agent having the formula (1) can be overcome by the use of a specific non-volatile solvent, namely polyethylene glycol. In this way, a liquid preparation of the fluorescent whitening agent having the formula (1) is obtained which is stable on storage at an elevated temperature, e.g., at 50°C.

Accordingly, the present invention provides a liquid preparation comprising:

- a) 10 to 40, preferably 20 to 25 % by weight of the fluorescent whitening agent having the formula (1);
- b) 10 to 85, preferably 20 to 70 % by weight of polyethylene glycol having a mean molecular weight in the range of from 150 to 500;
- c) 0 to 75, preferably 10 to 30 % by weight of water; and
- d) 0 to 20, preferably 0 to 15 % by weight of one or more auxiliary compounds; each based on the total weight of the liquid preparation.

The polyethylene glycol solvent, component b) of the liquid preparation according to the present invention, preferably has a relatively low mean molecular weight, for example a molecular weight in the range of from 200 to 500, in order to obtain a liquid preparation which has a low viscosity and which is pumpable.

While water, the optional component c) of the liquid preparation according to the present invention, is preferably present, in the preferred amounts indicated, the present invention also includes anhydrous liquid preparations.

The fluorescent whitening agent having the formula (1) may be produced, e.g. by the process described in GB-A-1 275 162, followed by purification, using aqueous caustic soda and oxidising agents at elevated temperature.

The formulations according to the present invention can also contain customary formulation auxiliaries, such as dispersing agents, protective colloids, solvents for protective colloids and/or antifreezes, stabilisers, preservatives, perfuming agents and sequestering agents.

Dispersing agents are preferably anionic in character, such as condensation products of aromatic sulfonic acids with formaldehyde, such as ditolylethersulfonic acid, naphthalenesulfonates or ligninsulfonates.

Examples of suitable protective colloids are modified polysaccharides derived from cellulose or heteropolysaccharides, such as xanthan, carboxymethylcellulose, polyvinyl alcohols (PVOH), chitosan or derivatives thereof, starch or derivatives thereof, and aluminium silicates or magnesium silicates.

Examples of solvents for protective colloids and/or antifreezes are ethylene glycol and propylene glycol which are preferably used in an amount of 0.2 to 5 % by weight, relative to the total weight of the formulation.

Compounds which may be used as stabilisers are 1,2-benzisothiazolin-3-one, formaldehyde or chloroacetamide,

preferably in an amount of 0.1 to 1 % by weight, relative to the total weight of the formulation.

Sequestering agents which may be used include ethylenediaminetetraacetic acid and nitrilotriacetic acid.

The formulations according to the present invention may be used, e.g., for the fluorescent whitening of paper or for incorporation into a detergent composition, conveniently by adding the required amount of the liquid preparation according to the present invention to a detergent composition, and then homogenising the mixture so obtained.

When used for the fluorescent whitening of paper, the formulations according to the present invention may be applied to the paper substrate in the form of a paper coating composition or directly in the size press.

In one preferred aspect, the present invention provides a method for the fluorescent whitening of a paper surface, comprising contacting the paper surface with a coating composition comprising a white pigment; a binder dispersion; optionally a water-soluble co-binder; and sufficient of a formulation according to the present invention, to ensure that the treated paper contains 0.01 to 1 % by weight, based on the white pigment, of a fluorescent whitening agent having the formula (1).

As the white pigment component of the paper coating composition used according to the method of the present invention, there are preferred inorganic pigments, e.g., aluminium or magnesium silicates, such as China clay and kaolin and, further, barium sulfate, satin white, titanium dioxide, calcium carbonate (chalk) or talcum; as well as white organic pigments.

The paper coating compositions used according to the method of the present invention may contain, as binder, inter alia, plastics dispersions based on copolymers of butadiene/styrene, acrylonitrile/butadiene/styrene, acrylic acid esters, acrylic acid esters/styrene/acrylonitrile, ethylene/vinyl chloride and ethylene/vinyl acetate; or homopolymers, such as polyvinyl chloride, polyvinylidene chloride, polyethylene and polyvinyl acetate or polyurethanes. A preferred binder consists of styrene/butyl acrylate or styrene/butadiene/ acrylic acid copolymers or styrene/butadiene rubbers. Other polymer latices are described, for example, in U.S. Patent Specifications 3,265,654, 3,657,174, 3,547,899 and 3,240,740.

The optional water-soluble protective colloid may be, e.g., soya protein, casein, carboxymethylcellulose, natural or modified starch, chitosan or a derivative thereof or, especially, polyvinyl alcohol. The preferred polyvinyl alcohol protective colloid component may have a wide range of saponification levels and molecular weights; e.g. a saponification level ranging from 40 to 100; and an average molecular weight ranging from 10,000 to 100,000.

Recipes for coating compositions for paper are described, for example, in J.P. Casey "Pulp and Paper"; Chemistry and Chemical Technology, 2nd edition, Volume III, pages 1684-1649 and in "Pulp and Paper Manufacture", 2nd and 5th edition, Volume II, page 497 (McGraw-Hill).

The paper coating compositions used according to the method of the present invention preferably contain 10 to 70 % by weight of a white pigment. The binder is preferably used in an amount which is sufficient to make the dry content of polymeric compound up to 1 to 30 % by weight, preferably 5 to 25 % by weight, of the white pigment. The amount of fluorescent brightener preparation used according to the invention is calculated so that the fluorescent brightener is preferably present in amounts of 0.01 to 1 % by weight, more preferably 0.05 to 1 % by weight, and especially 0.05 to 0.6% by weight, based on the white pigment.

The paper coating composition used in the method according to the invention can be prepared by mixing the components in any desired sequence at temperature from 10 to 100°C, preferably 20 to 80°C. The components here also include the customary auxiliaries which can be added to regulate the rheological properties, such as viscosity or water retention capacity, of the coating compositions. Such auxiliaries are, for example, natural binders, such as starch, casein, protein or gelatin, cellulose ethers, such as carboxyalkylcellulose or hydroxyalkylcellulose, alginic acid, alginates, polyethylene oxide or polyethylene oxide alkyl ethers, copolymers of ethylene oxide and propylene oxide, polyvinyl alcohol, water-soluble condensation products of formaldehyde with urea or melamine, polyphosphates or polyacrylic acid salts.

The coating composition used according to the method of the present invention is preferably used to produce coated printed or writing paper, or special papers such as cardboard or photographic papers.

The coating composition used according to the method of the invention can be applied to the substrate by any conventional process, for example with an air blade, a coating blade, a roller, a doctor blade or a rod, or in the size press, after which the coatings are dried at paper surface temperatures in the range from 70 to 200°C, preferably 90 to 130°C, to a residual moisture content of 3-8 %, for example with infra-red driers and/or hot-air driers. Comparably high degrees of whiteness are thus achieved even at low drying temperatures.

By the use of the method according to the invention, the coatings obtained are distinguished by optimum distribution of the dispersion fluorescent brightener over the entire surface and by an increase in the level of whiteness thereby achieved, by a high fastness to light and to elevated temperature (e.g. stability for 24 hours at 60-100°C.) and excellent bleed-fastness to water.

In a second preferred aspect, the present invention provides a method for the fluorescent whitening of a paper surface comprising contacting the paper in the size press with an aqueous solution containing a size, optionally an inorganic or organic pigment and 0.1 to 20g/l of a fluorescent whitening agent having the formula (1). Preferably, the

size is starch, a starch derivative or a synthetic sizing agent, especially a water-soluble copolymer.

Further, the aqueous fluorescent whitener formulations used according to the method of the present invention have the following valuable properties: low electrolyte content; low charge density; trouble-free incorporation into coating colours; no interaction with other additives; low interference by cationic auxiliaries; and excellent compatibility with and resistance to oxidising agents and peroxy-containing bleach residues.

The following Examples further illustrate the present invention. Parts and percentages are by weight unless otherwise stated.

#### Examples 1 and 2

##### A) Formation of the Fluorescent Whitener Formulation

By stirring together, at 25°C., the components shown in the following Table 1, the respective aqueous formulations are obtained.

Table 1

Example	% FWA	% PEG 300	% water	% PVOH
-	24	0	76	0.1
1	24	30	46	0.1
2	24	40	36	0.1

In the Table 1, FWA denotes a dispersion of the fluorescent whitening agent having the formula (1), in the hydrate p-form described in EP-A-0 577 557; PEG 300 denotes a commercial polyethylene glycol having a molecular weight of 300; and PVOH denotes a commercial polyvinyl alcohol.

The control formulation (containing no PEG) separates into two phases after storage for 5 hours at 50°C.

By contrast, the formulations according to the invention and containing PEG are pourable and pumpable immediately on formation and remain so even after storage for 5 hours at 50°C.

##### B) Preparation of the Coating Composition

The following formulation is made up:

20 parts of a commercial clay (Clay SPS);  
 80 parts of a commercial calcium carbonate (Hydrocarb 90);  
 18 parts of a commercial 50% dispersion of a styrene/butadiene rubber latex (Dow Latex 955);  
 0.5 part of a commercial polyvinyl alcohol (Mowiol 4-98);  
 0.5 part of carboxymethylcellulose (Finnfix 5);  
 0.3 part of a polycarboxylic acid dispersant (Polysalz S); and  
 0.5 part of a commercial 65% melamine/formaldehyde precondensate (Protex M3M).

Sufficient of the formulation of Example 1(A) or 2(A) is then added to provide 0.2 part of the fluorescent whitener of formula (1). The content of the dry substance in the coating composition is adjusted to 60% and the pH is adjusted to 9.5 using NaOH.

##### C) Application of the Coating Composition to Paper

Commercial base paper of LWC (light weight coated) quality having a weight per unit area of 39g/m<sup>2</sup> and a content of mechanical wood pulp of 50%, is coated in a Dow laboratory coater at a blade pressure of 0.48 bar, at an application consistency of 60% at pH 9.2 with a respective aqueous coating composition as shown in Part B).

The respective coated papers are dried at 195 to 200°C. until the moisture content is constant at about 7% by weight, under standard conditions. The coating weight, after acclimatisation (23°C., 50% relative humidity), is 10.0 ± 1.9g/m<sup>2</sup>.

##### D) Application of the Fluorescent Whitener Formulation in the Size Press

Separate samples of an 8% aqueous solution of an anionic starch (Perfectauryl A 4692), respectively containing

4 g/l of the formulation of Example 1 or 2, are applied to each of two separate base papers in the size press, at a 37% pick-up.

The respective treated papers are then dried at 80°C. using hot air.

The first base paper (paper I) used is one which has been sized with 1.5% of commercial rosin size dispersion and alum, resulting in a paper which has a pH of 4.7. The second base paper (paper II) used is one which has been sized with 1.5% of commercial AKD (alkyldiketene) size dispersion and which has a pH of 7.5.

The Ganz Whiteness of each coated paper is determined using a Datacolor measuring device.

The Ganz method is described in detail in the Ciba-Geigy Review, 1973/1, and also in the article "Whiteness Measurement", ISCC Conference on Fluorescence and the Colorimetry of Fluorescent Materials, Williamsburg, February 1972, published in the Journal of Color and Appearance, 1, No.5 (1972).

The results are set out in the following Table 2:

Table 2

Example	Ganz Whiteness		
	coating	size press	
		paper I	paper II
control	109	173	189
1	116	169	184
2	115	169	188

The results in Table 2 demonstrate that the whiteness of the treated paper is not impaired by the method of the present invention when applied in the size press, and is slightly improved when a paper coating technique is used.

#### Examples 3 to 5

##### A) Formation of the Fluorescent Whitener Formulation

By heating together, at about 90°C., until the FWA has completely dissolved, then cooling the solution so obtained, with agitation, until the FWA completely crystallizes out, forming a stable dispersion, the respective compositions shown in the following Table 3 are obtained.

Table 3

Example	% FWA	% PEG 300	% water	% PVOH
3	24	50	26	0.1
4	24	60	16	0.1
5	24	66	10	0.1

In Table 3, PEG and PVOH have the same significance as in Table 1 but FWA denotes the pure powdered of the fluorescent whitening agent having the formula (1).

The respective formulations are each pourable and pumpable immediately on formation and remain so even after storage for 5 hours at 50°C.

##### B) Preparation of the Coating Composition

Using the procedure described in Part B) of Examples 1 and 2, respective coating compositions are prepared from compositions shown in Table 3.

##### C) Application of the Coating Composition to Paper

Using the procedure described in Part C) of Examples 1 and 2, the same commercial LWC base paper is coated with the respective coating compositions of Part B).

## D) Application of the Fluorescent Whitener Formulation in the Size Press

Using the procedure described in Part D) of Examples 1 and 2, the same base papers I and II are treated in the size press with separate samples of an 8% aqueous solution of an anionic starch (Perfectauryl A 4692), respectively containing 4 g/l of the formulation of Example 3, 4 or 5, in the manner described.

The results obtained are set out in the following Table 4.

Table 4

Example	Ganz Whiteness		
	coating	size press	
		paper I	paper II
control	109	173	189
3	119	174	185
4	119	172	185
5	115	184	182

The results in Table 4 demonstrate that the whiteness of the treated paper is not impaired by the method of the present invention when applied in the size press, and is slightly improved when a paper coating technique is used.

## Example 6


When the procedure described in Part A) of Example 3 is repeated except that the lithium salt of the compound of formula (1) is used instead of the corresponding sodium salt, a pourable and pumpable formulation is obtained immediately on formation and the formulation remains pumpable, even after storage for 5 hours at 50°C.

When the procedure described in Parts B), C) and D) of Example 3 is repeated using the lithium salt of the compound of formula (1), the respective Ganz Whiteness values obtained are 123 (coating application) and, in the size press, 185 for paper I and 191 for paper II.

## Claims

1. A liquid preparation comprising:

a) 10 to 40 % by weight of the fluorescent whitening agent having the formula:



wherein M is hydrogen, an alkali metal, ammonium or magnesium;

- b) 10 to 85 % by weight of polyethylene glycol having a mean molecular weight in the range of from 150 to 500;
- c) 0 to 75 % by weight of water; and
- d) 0 to 20 % by weight of one or more auxiliary compounds; each based on the total weight of the liquid preparation.

2. A liquid preparation according to claim 1 comprising:

- a) 20 to 25 % by weight of the fluorescent whitening agent having the formula (1) wherein M is hydrogen, lithium, sodium or potassium, ammonium or magnesium;
- b) 20 to 70 % by weight of polyethylene glycol having a mean molecular weight in the range of from 150 to 500;
- c) 10 to 30 % by weight of water; and
- d) 0 to 15 % by weight of one or more auxiliary compounds; each based on the total weight of the liquid preparation.

3. A liquid preparation according to claim 2 in which M is sodium or lithium.
4. A liquid preparation according to any of the preceding claims in which the polyethylene glycol has a mean molecular weight in the range of from 200 to 500.
5. A liquid preparation according to any of the preceding claims which contains one or more auxiliaries selected from dispersing agents, protective colloids, solvents for protective colloids and/or antifreezes, stabilisers, perfuming agents and sequestering agents.
6. A liquid preparation according to claim 5 in which the dispersing agents are anionic in character.
7. A liquid preparation according to claim 6 in which the dispersing agents are condensation products of aromatic sulfonic acids with formaldehyde.
8. A liquid preparation according to claim 7 in which the dispersing agents are ditolyethersulfonic acid, naphthalenesulfonates or ligninsulfonates.
9. A liquid preparation according to any of claims 5 to 8 in which the protective colloids are modified polysaccharides derived from cellulose or heteropolysaccharides, carboxymethylcellulose, polyvinyl alcohols (PVOH), chitosan or derivatives thereof, starch or derivatives thereof, aluminium silicates or magnesium silicates.
10. A liquid preparation according to claim 9 in which the modified polysaccharide is xanthan.
11. A liquid preparation according to claim 5 in which the solvents for protective colloids and/or antifreezes are ethylene glycol or propylene glycol.
12. A liquid preparation according to claim 5 in which the amount of ethylene glycol or propylene glycol is 0.2 to 5 % by weight, relative to the total weight of the formulation.
13. A liquid preparation according to claim 5 in which the stabilisers are 1,2-benzisothiazolin-3-one, formaldehyde or chloroacetamide.
14. A liquid preparation according to claim 13 in which the 1,2-benzisothiazolin-3-one, formaldehyde or chloroacetamide are used in an amount of 0.1 to 1 % by weight, relative to the total weight of the formulation.
15. A liquid preparation according to claim 5 in which the sequestering agents are ethylenediaminetetraacetic acid or nitrilotriacetic acid.
16. A method for the fluorescent whitening of paper, comprising applying to the paper a liquid preparation according to any of the preceding claims.
17. A method according to claim 16 in which paper is to be subjected to fluorescent whitening, and the liquid preparation is applied to the paper substrate in the form of a paper coating composition or directly in the size press.
18. A method according to claim 17 for the fluorescent whitening of a paper surface, comprising contacting the paper surface with a coating composition comprising a white pigment; a binder dispersion; optionally a water-soluble co-binder; and sufficient of a formulation according to any of claims 1 to 17, to ensure that the treated paper contains 0.01 to 1 % by weight, based on the white pigment, of a fluorescent whitening agent having the formula (1).
19. A method according to claim 18 in which the white pigment component of the paper coating composition is an inorganic pigment or a white organic pigment.
20. A method according to claim 19 in which the inorganic pigment is an aluminium or magnesium silicate, barium sulfate, satin white, titanium dioxide, calcium carbonate (chalk) or talcum.
21. A method according to claim 20 in which the aluminium or magnesium silicate is China clay, kaolin or a zeolite.
22. A method according to any of claims 18 to 21 in which the binder is a plastics dispersion based on copolymers of

butadiene/styrene, acrylonitrile/butadiene/styrene, acrylic acid esters, acrylic acid esters/styrene/acrylonitrile, ethylene/vinyl chloride and ethylene/vinyl acetate; or based on homopolymers of polyvinyl chloride, polyvinylidene chloride, polyethylene or polyvinyl acetate; or based on polyurethanes.

- 5 23. A method according to any of claims 18 to 22 in which the optional water-soluble co-binder is soya protein, casein, carboxymethylcellulose, natural or modified starch, polyvinyl alcohol, chitosan or a derivative thereof.
24. A method according to claim 23 in which polyvinyl alcohol co-binder component has a saponification level ranging from 40 to 100 and an average molecular weight ranging from 10,000 to 100,000.
- 10 25. A method according to any of claims 18 to 24 in which the paper coating composition contains 10 to 70 % by weight of a white pigment; an amount of binder which is sufficient to make the dry content of polymeric compound up to 1 to 30 % by weight of the white pigment; and an amount of fluorescent brightener preparation according to any of claims 1 to 17 which is calculated so that the fluorescent brightener is present in amounts of 0.01 to 1 % by weight, based on the white pigment.
- 15 26. A method according to any of claims 18 to 25 in which the paper coating composition also includes, as auxiliaries, natural binders, cellulose ethers, alginic acid, alginates, polyethylene oxide or polyethylene oxide alkyl ethers, copolymers of ethylene oxide and propylene oxide, polyvinyl alcohol, water-soluble condensation products of formaldehyde with urea or melamine, polyphosphates or polyacrylic acid salts.
- 20 27. A method according to any of claims 18 to 26 in which the coating composition is used for coating paper, cardboard or photographic paper.
- 25 28. A method for the fluorescent whitening of a paper surface comprising contacting the paper in the size press with an aqueous solution containing a size, optionally an inorganic or organic pigment and 0.1 to 20g/l of a fluorescent whitening agent having the formula (1).
- 30 29. A method according to claim 28 in which the size is starch, a starch derivative or a synthetic sizing agent
30. A method according to claim 29 in which the synthetic sizing agent is a water-soluble copolymer.
31. A detergent composition comprising a liquid preparation according to any of claims 1 to 15.
- 35 32. A method of producing a detergent composition comprising incorporating into a base detergent formulation, a liquid preparation according to any of claims 1 to 15, and homogenising the mixture so obtained.





European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 95 81 0660

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	EP-A-0 032 483 (CIBA GEIGY AG) 22 July 1981 * examples 1-3, 13-17 * * examples 21-23, 33 *	1-5, 11, 16	D21H21/30 C11D3/42 //D21H17:71, 17:06, 17:53, 19:44
Y	* page 4 - page 9 * * page 11 - page 15 * ---	1-32	
X	NZ-A-260 472 (CIBA GEIGY AG) 26 October 1994  * page 11; example 10 * * the whole document *	1, 3-5, 11, 16, 17, 28, 29	
Y	---	1-30	
D, X	EP-A-0 577 557 (CIBA GEIGY AG) 5 January 1994 * page 4, line 56 - page 5, line 34 * * the whole document *	1-3, 5	
Y	---	1-32	
Y	GB-A-2 239 026 (SIGMA PROD CHIM) 19 June 1991 * the whole document *	1, 2, 4-6, 31, 32	
Y	US-A-3 853 583 (NEAVE A ET AL) 10 December 1974 * column 2 - column 3 *	1	TECHNICAL FIELDS SEARCHED (Int.Cl.6)  D21H C11D
D, Y	GB-A-1 275 162 (CIBA GEIGY) 24 May 1972 * the whole document * see in particular page 5, lines 13 to 25 ---	1, 5, 6	
D, A	GB-A-1 247 934 (CIBA GEIGY) 29 September 1971 -----		
The present search report has been drawn up for all claims			
Place of search <b>MUNICH</b>		Date of completion of the search <b>16 January 1996</b>	Examiner <b>Nestby, K</b>
<b>CATEGORY OF CITED DOCUMENTS</b> X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 (01.91) (P04-CH)